
Class 150 Flanged Ball Valve

A manual two-piece flanged ball valve in ASME Class 150, available in 1/2 to 4 inch sizes with ISO 5211 mounting interfaces listed by size.

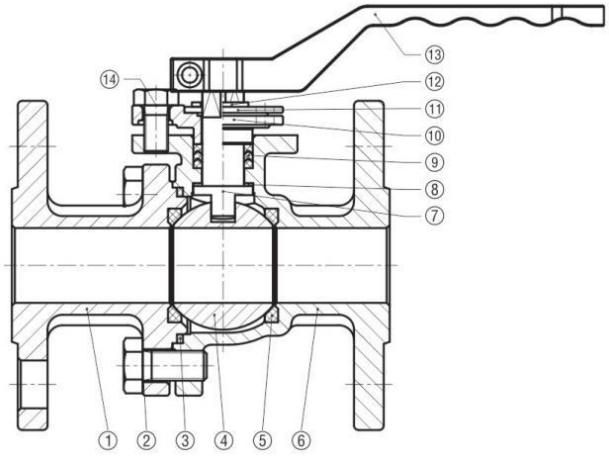

Body	CF8 / CF8M stainless steel; WCB carbon steel
Sizes	1/2-4 in
Pressure	ASME Class 150
Ends	Flanged, ASME B16.5 Class 150
Seat	PTFE / RPTFE / CPTFE / PPL / PEEK
Operation	Manual lever

Principal materials

Bonnet	A351 CF8 / A351 CF8M / A216 WCB
Ball	SUS304 / SUS316
Seat	PTFE / RPTFE / CPTFE / PPL / PEEK
Body	A351 CF8 / A351 CF8M / A216 WCB
Stem	SUS304 / SUS316
V-ring packing	PTFE / RPTFE
Handle	SUS304

Temperature suitability and the pressure-temperature rating are confirmed for the selected configuration and service conditions. Samples, small orders and private-label options are available.

Class 150 Flanged Ball Valve - Dimensions

Dimensions are in millimetres. The drawing and table describe the catalog configuration shown here. Confirm the final drawing with your quotation.

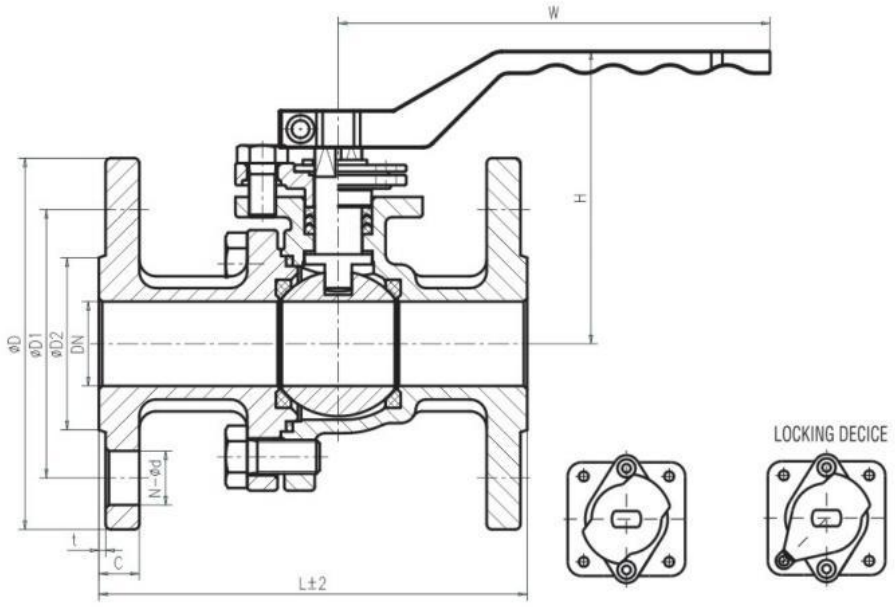


Fig.402
ASME CLASS 150LB

ANSI FLANGE BALL VALVE SIZE(mm)											
SIZE	DN	D2	D1	D	C	t	L	d	N	W	ISO5211
1/2"	16	35	60.5	90	10	2	108	16	4	135	F04
3/4"	20	43	70	100	11	2	117	16	4	135	F04
1"	25	51	79.5	110	12	2	127	16	4	160	F05
1 1/4"	32	63.5	89	115	13	2	140	16	4	160	F05
1 1/2"	38	73	98.5	125	15	2	165	16	4	230	F07
2"	50	92	120.5	150	16	2	178	19	4	230	F07
2 1/2"	65	105	140	180	18	2	190	19	4	230	F07
3"	80	127	152.5	190	19	2	203	19	4	320	F10
4"	100	157	190.5	230	24	2	229	19	8	320	F10

Dimensions and connection options apply to the selected drawing. Confirm the final configuration with your quotation.