
2-Piece Threaded Ball Valve

A manual two-piece ball valve with female threaded ends, available in 1/4 to 4 inch sizes at 1000 PSI, with stainless steel and carbon steel body options.

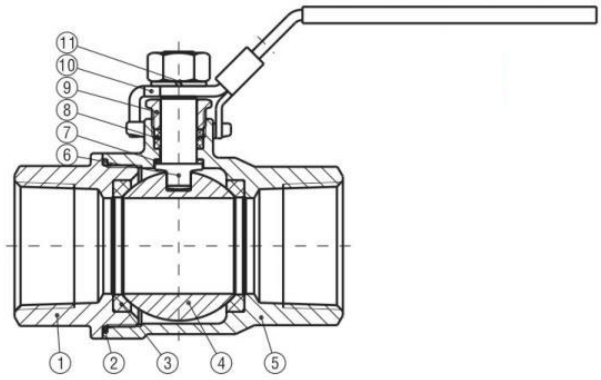

Body	CF8 / CF8M stainless steel; WCB carbon steel
Sizes	1/4-4 in
Pressure	1000 PSI
Ends	Female threaded; specify thread standard
Seat	PTFE / RPTFE / PPL / PEEK
Operation	Manual lever

Principal materials

Bonnet	A351 CF8 / A351 CF8M / A216 WCB
Seat	PTFE / RPTFE / PPL / PEEK
Ball	SUS304 / SUS316
Body	A351 CF8 / A351 CF8M / A216 WCB
Stem	SUS304 / SUS316
V-ring packing	PTFE / RPTFE
Handle	SUS304

Temperature suitability and the pressure-temperature rating are confirmed for the selected configuration and service conditions. Samples, small orders and private-label options are available.

Thread standards: ANSI B1.20.1, BS 21, DIN 2999/259, ISO 228-1, ISO 7-1, JIS B0203. Specify the required thread when ordering.

2-Piece Threaded Ball Valve - Dimensions

Dimensions are in millimetres. The drawing and table describe the catalog configuration shown here. Confirm the final drawing with your quotation.

TWO PIECE
BALL VALVE 1000PSI/2000PSI

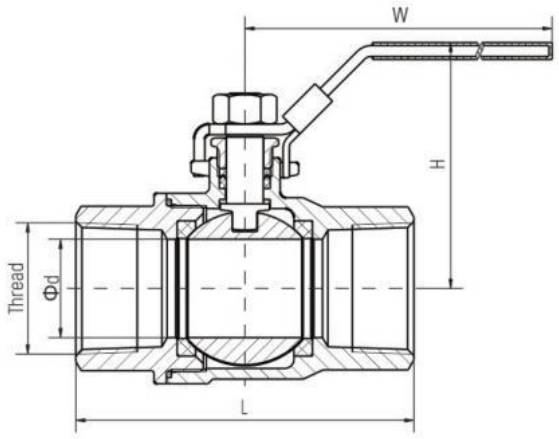


Fig.201
1000psi

FEMALE THREAD BALL VALVE SIZE (mm)				
Size	d	L	H	W
1/4"	10	55	49	95
3/8"	12	60	49	95
1/2"	15	75	52	105
3/4"	20	80	63	125
1"	25	90	67	135
1 1/4"	32	110	80	140
1 1/2"	38	120	93	175
2"	49	140	110	175
2 1/2"	64	185	117	220
3"	76	205	134	230
4"	100	240	157	310

Dimensions and connection options apply to the selected drawing. Confirm the final configuration with your quotation.