
High-Pressure 3-Piece Ball Valve

A full-bore three-piece threaded ball valve with a mounting platform and manual lever, rated 2000 PSI for DN8-DN25 and 1500 PSI for DN32-DN50.

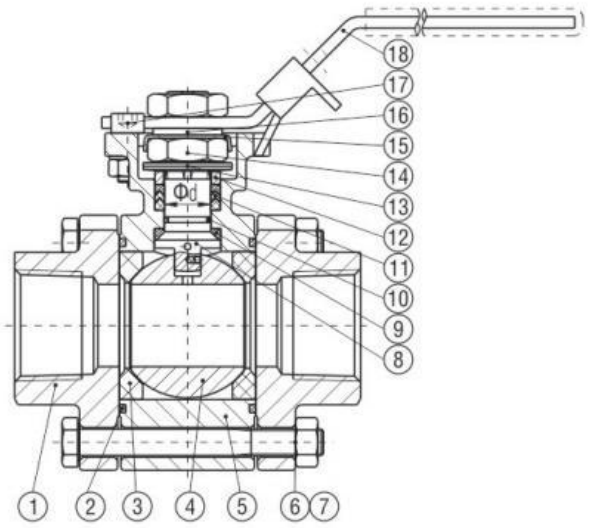

Body	CF8 / CF8M stainless steel; WCB carbon steel
Sizes	DN8-DN50, full bore
Pressure	DN8-DN25: 2000 PSI; DN32-DN50: 1500 PSI
Ends	Female threaded; specify thread standard
Seat	RPTFE / PPL / PEEK
Operation	Manual lever

Principal materials


Bonnet	A351 CF8 / A351 CF8M / A216 WCB
Seat	RPTFE / PPL / PEEK
Ball	SUS304 / SUS316
Body	A351 CF8 / A351 CF8M / A216 WCB
Stem	SUS304 / SUS316
V-ring packing	PTFE / RPTFE
Handle	SUS304

Temperature suitability and the pressure-temperature rating are confirmed for the selected configuration and service conditions. Samples, small orders and private-label options are available.

Thread standards: ANSI B1.20.1, BS 21, DIN 2999/259, ISO 228-1, ISO 7-1, JIS B0203. Specify the required thread when ordering.

High-Pressure 3-Piece Ball Valve - Dimensions

Dimensions are in millimetres. The drawing and table describe the catalog configuration shown here. Confirm the final drawing with your quotation.

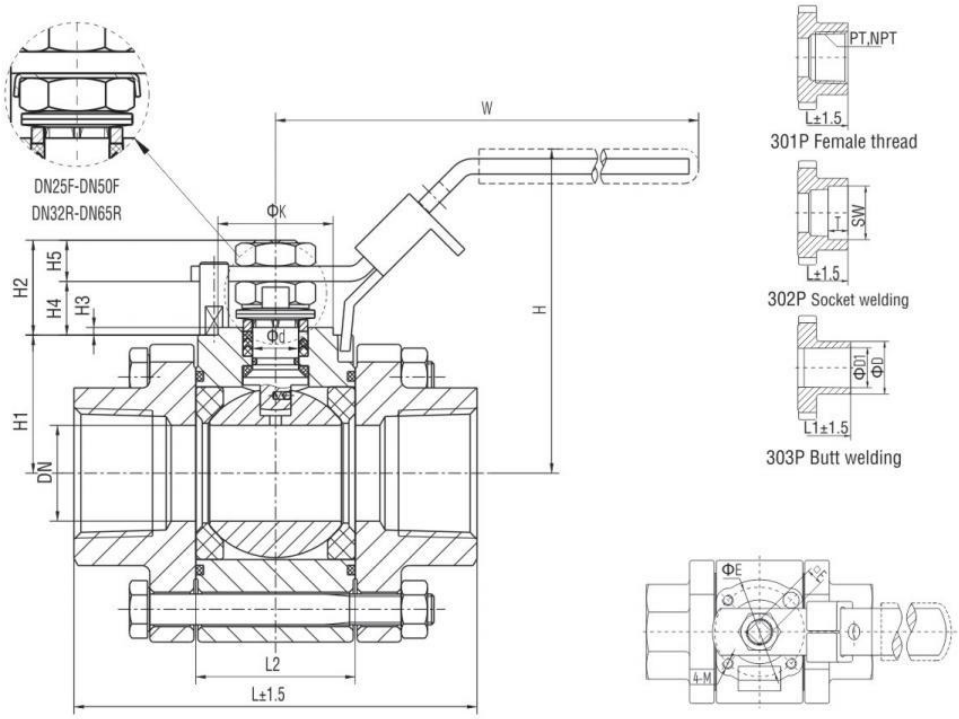

Full-bore size	L	H	W
DN8 / DN10	65	63	135
DN15	75	68	135
DN20	85	72	135
DN25	105	85	175
DN32	111	89	175
DN40	127	100	210
DN50	143	118	210

Dimensions and connection options apply to the selected drawing. Confirm the final configuration with your quotation.